


type: HPM48-10000

NO.: G20130522003

operator: 001

date: 2013-5-22

GOLDEN Motor test curve

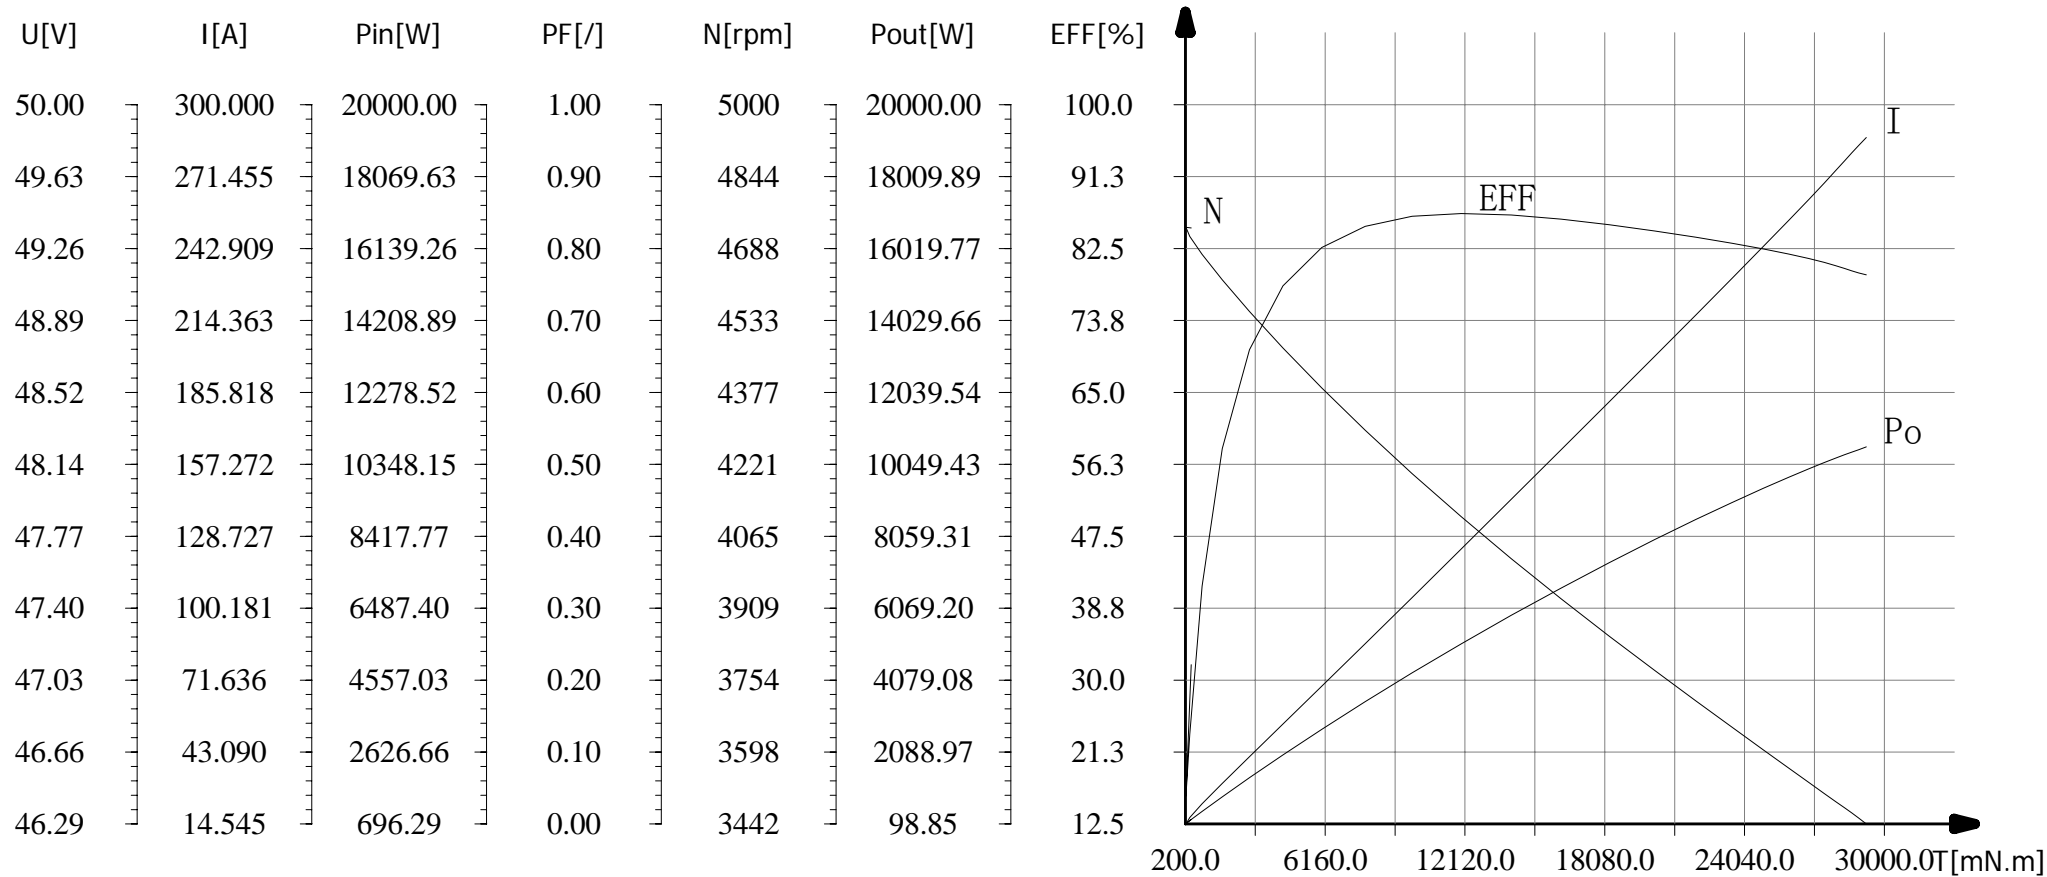

Description	voltage (V)	current (A)	P. input (W)	torque (mN. m)	rotate (RPM)	P. output (W)	eff (%)
Upload point	47.87	14.545	696.29	420.0	4733	208.15	29.9
Most efficiency point	47.36	123.658	5858.78	11957.0	4108	5080.18	86.8
Max Po. point	46.29	286.946	13280.40	29227.5	3442	10530.85	79.3
Max torque point	46.29	286.946	13280.40	29227.5	3442	10530.85	79.3
End point	46.29	286.955	13282.43	29230.0	3442	10535.04	79.3
Rated rotatepoint	46.46	268.845	12494.43	27432.9	3508	10096.92	80.8