

Hub Motor Performance Sheet

客户名称(Customer):

客户档案(Filename):

电机型号(Type):


电机编号(Number):

额定电压(Voltage): 36v

额定功率(Power Rated): 400w 300r/min

测试人员(Tester):

测试日期(Test Date): 2004.06.24

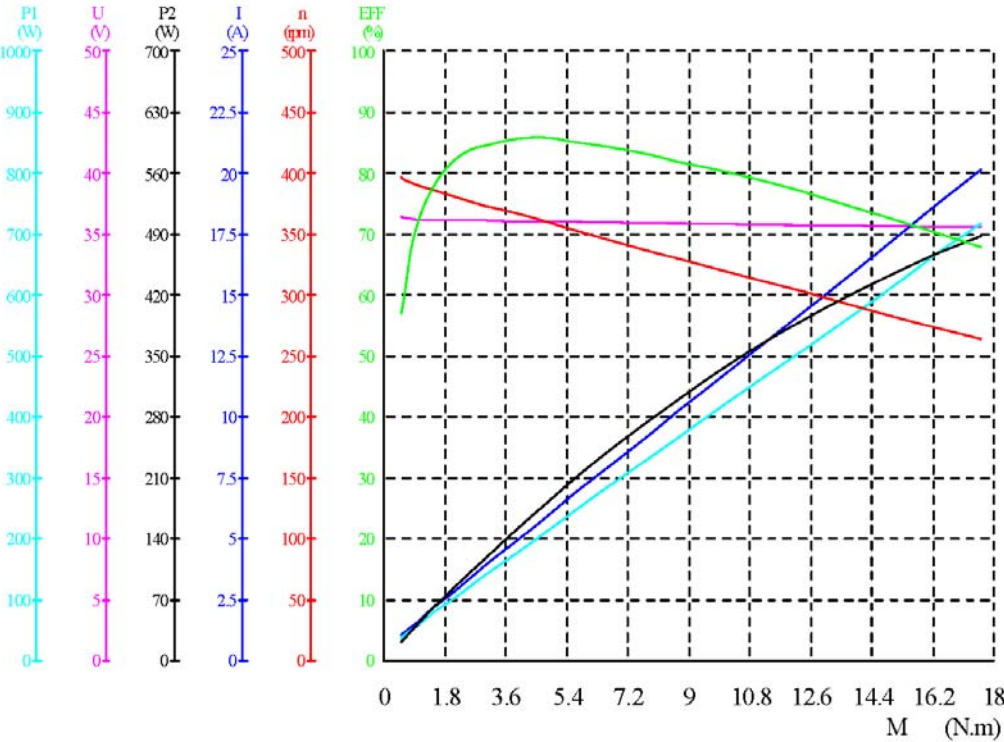

项目(Descripton)	U	I	P1	M	n	P2	Eff
	(V)	(A)	(W)	(N.m)	(rpm)	(W)	(%)
空载点(No_Load)	36.33	1.017	36.99	0.51	395.2	21.10	57.0
最高效率点(Max_Eff)	35.97	5.498	197.7	4.52	361.3	170.9	86.4
最大输出功率点(Max_Pout)	35.53	20.12	715.2	17.68	263.0	486.8	68.0
最大转矩点(Max_Torque)	35.53	20.12	715.2	17.68	263.0	486.8	68.0
结束(End)	35.53	20.12	715.2	17.68	263.0	486.8	68.0

客户名称(Customer): 额定电压(Voltage): 36v
客户档案(Filename): 400 w 040624 001 zha.gzd 额定功率(Power Rated): 400w 300r/min
电机型号(Type): 测试人员(Tester):
电机编号(Number): 测试日期(Test Date): 2004.06.24

No:	U	I	P1	M	n	P2	EFF
	(V)	(A)	(W)	(N.m)	(rpm)	(W)	(%)
1	36.33	1.017	36.99	0.51	395.2	21.10	57.0
2	36.30	1.090	39.60	0.55	394.8	22.73	57.4
3	36.25	1.186	43.01	0.64	393.6	26.37	61.3
4	36.18	1.319	47.76	0.78	392.0	32.01	67.0
5	36.11	1.488	53.76	0.95	389.7	38.76	72.0
6	36.07	1.771	63.91	1.18	387.8	47.91	74.9
7	36.06	2.151	77.59	1.50	385.4	60.52	78.0
8	36.04	2.587	93.27	1.91	382.2	76.43	81.9
9	36.03	3.150	113.5	2.41	378.2	95.43	84.0
10	36.01	3.853	138.8	3.00	373.4	117.2	84.4
11	35.99	4.649	167.3	3.71	367.7	142.8	85.3
12	35.97	5.498	197.7	4.52	361.3	170.9	86.4
13	35.94	6.582	236.5	5.44	354.2	201.7	85.2
14	35.91	7.695	276.3	6.43	346.5	233.2	84.4
15	35.86	8.868	318.1	7.52	338.4	266.4	83.7
16	35.83	10.17	364.5	8.67	329.7	299.2	82.0
17	35.79	11.49	411.5	9.87	320.7	331.4	80.5
18	35.75	12.86	459.7	11.11	311.5	362.3	78.8
19	35.70	14.28	510.0	12.40	301.9	391.9	76.8
20	35.65	15.74	561.3	13.72	292.0	419.4	74.7
21	35.61	17.19	612.5	15.02	282.4	444.1	72.4
22	35.57	18.69	665.1	16.34	272.8	466.7	70.1
23	35.53	20.12	715.2	17.68	263.0	486.8	68.0