


客户名称

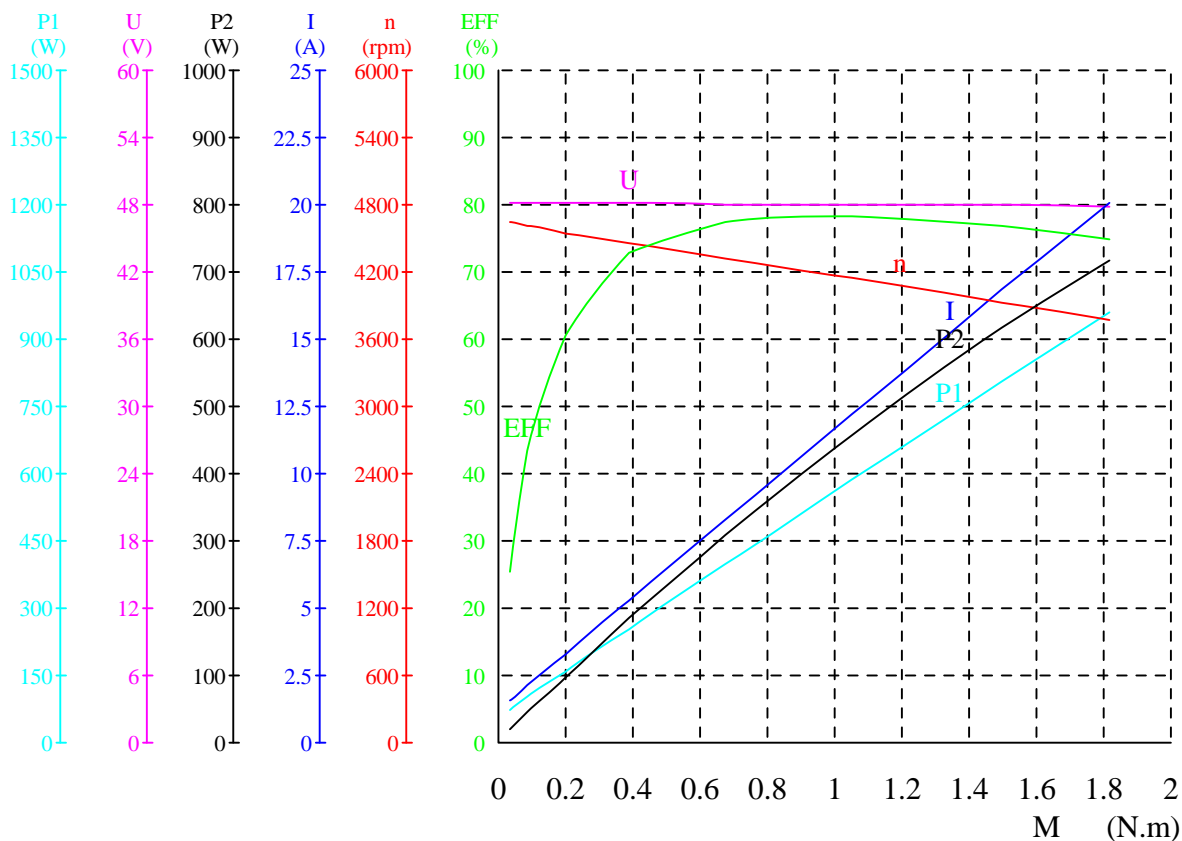

项目(Descripton)	U	I	P1	M	n	P2	Eff
	(V)	(A)	(W)	(N.m)	(rpm)	(W)	(%)
空载点(No_Load)	48.08	1.506	72.41	0.038	4638	18.45	25.4
最高效率点(Max_Eff)	47.93	12.16	583.1	1.054	4136	456.4	78.2
最大输出功率点(Max_Pout)	47.81	20.05	958.6	1.822	3757	716.6	74.7
最大转矩点(Max_Torque)	47.81	20.05	958.6	1.822	3757	716.6	74.7
结束(End)	47.81	20.05	958.6	1.822	3757	716.6	74.7

# Golden Motor

客户名称(Customer): 额定电压(Voltage): 48V  
 客户档案(Filename): 双面磁钢深21.05.11.19新48V.gzd 额定功率(Power Rated): 700W  
 电机型号(Type): 测试人员(Tester):  
 电机编号(Number): 测试日期(Test Date): 2005.11.19

\*\*\*\*\*

No:	U	I	P1	M	n	P2	EFF
	(V)	(A)	(W)	(N.m)	(rpm)	(W)	(%)
1	48.08	1.506	72.41	0.038	4638	18.45	25.4
2	48.08	1.638	78.80	0.049	4632	23.76	30.1
3	48.08	1.821	87.57	0.066	4622	31.93	36.4
4	48.07	2.091	100.5	0.090	4610	43.44	43.2
5	48.07	2.411	115.9	0.119	4595	57.25	49.3
6	48.07	2.804	134.8	0.155	4576	74.26	55.0
7	48.06	3.271	157.2	0.200	4542	95.10	60.4
8	48.05	3.840	184.5	0.253	4518	119.6	64.8
9	48.04	4.508	216.6	0.317	4489	148.9	68.7
10	48.03	5.263	252.8	0.394	4451	183.6	72.6
11	48.03	6.169	296.3	0.477	4412	220.3	74.3
12	48.01	7.170	344.2	0.572	4363	261.2	75.8
13	48.00	8.255	396.2	0.678	4312	306.0	77.2
14	47.98	9.455	453.6	0.795	4257	354.3	78.1
15	47.96	10.77	516.7	0.919	4197	403.8	78.1
16	47.93	12.16	583.1	1.054	4136	456.4	78.2
17	47.92	13.64	654.0	1.196	4070	509.6	77.9
18	47.88	15.18	727.0	1.345	4000	563.2	77.4
19	47.86	16.79	803.8	1.500	3922	615.9	76.6
20	47.84	18.41	881.1	1.661	3843	668.3	75.8
21	47.81	20.05	958.6	1.822	3757	716.6	74.7